


HD-3000v2 Dimensions & Connectors

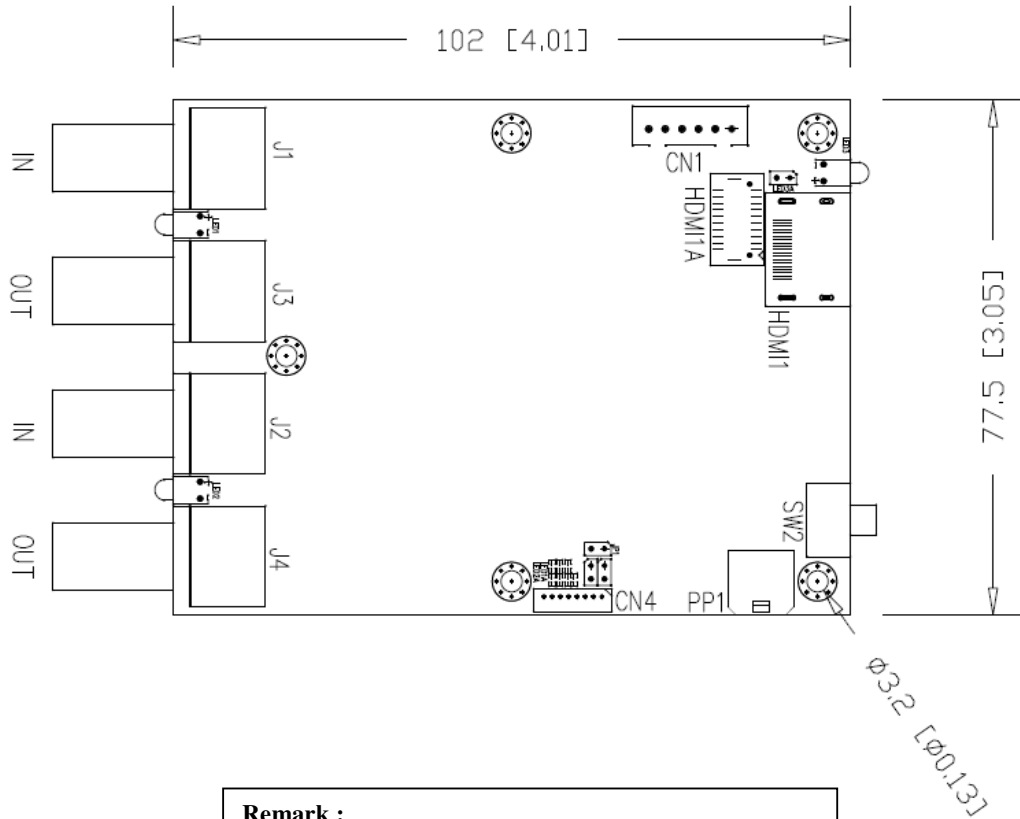

Remark :

- Unit : mm [inch]
- The above diagram is not draw in scale

Connector definitions

Connector	Description	Type/use
J1	SD/HD-SDI 1 Input	BNC connector
J2	SD/HD-SDI 2 Input	BNC connector
J3	SD/HD-SDI 1 re-clock loop through output	BNC connector
J4	SD/HD-SDI 2 re-clock loop through output	BNC connector
CN1	RS-232 & I ² C control connector	JST 6-way, B6B-XH-A (Matching type : XHP-6)
CN4	External I/O connector	Hirose DF13-6P-1.25DSA (Matching type : Hirose DF13-8S-1.25C)
HDMI1	HDMI 1 Output	HDMI connector
HDMI1A	Alternate HDMI 1 Output	JST BM20B-SRDS (Matching type : JST SHDR-20V-S-B)
PP1	Power Input	Molex 43650-0200 compatible (Matching connector type : Molex 43645-0200 compatible) (Matching power cable : P/N 426013800-3)